



**VAN STORAGE SOLUTIONS**

# INSTALLATION MANUAL

**BULKHEAD FOR 2015 RAM PROMASTER CITY  
Model Number 96112-3-01 and 96512-3-01**


**WEATHERGUARD.COM**

**ATTENTION: PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS AND WARNINGS BEFORE ASSEMBLING, INSTALLING OR USING THIS PRODUCT.**

**FOR ELECTRIC VEHICLES** – Drilling into electrical wiring may damage vehicle systems and may cause bodily harm. This equipment should be installed by qualified personnel familiar with this type of vehicle and the hazards involved. To prevent damage to components underneath the floor, mainly the battery and high voltage system components, refer to your vehicle manufacturer's instructions or the manufacturer's website for more information.

## **! PLAN YOUR VAN (TIPS FOR FASTER INSTALLATION)**


- Installing your WEATHER GUARD® Bulkhead for the Ram Promaster City is very clear cut following these instructions.
- This installation will not require cutting or drilling any sheet metal on the vehicle.

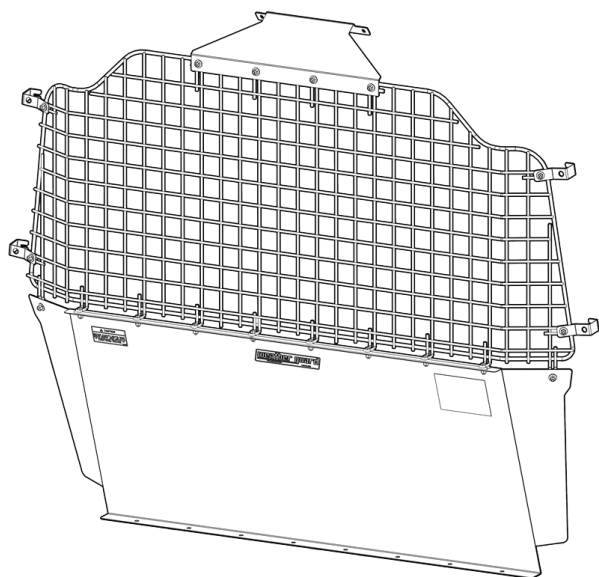

**96112-3-01**

### **BOLT KIT**

DESCRIPTION	QTY.
1/4-20 x 3/4" Hex Head Bolts	18
1/4-20 Nylon Lock Nuts	18
1/4" Flat Washers	18
M8-1.25 x 25mm Bolts	8
M6-1.0 x 16mm Bolts	6

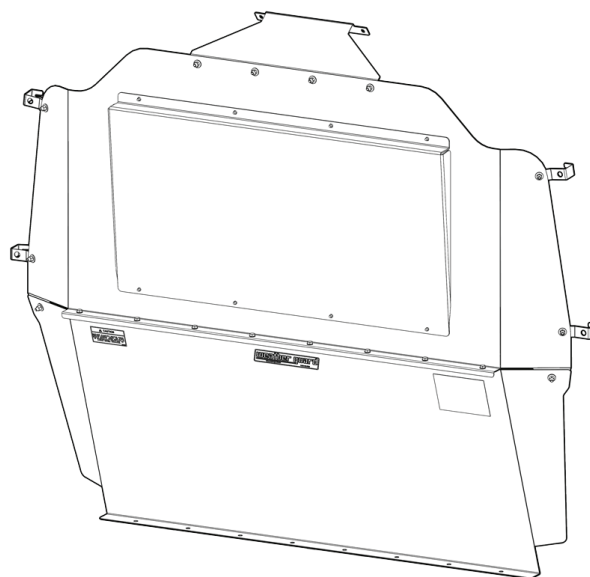

**96512-3-01**

### **TOOLS REQUIRED**

- 1/4" Ratchet Driver
- 3/8" Ratchet Driver
- 7/16" Socket
- 7/16" Wrench
- 13mm Wrench
- 10mm Socket (1/4" Drive)
- 13mm Socket (3/8" Drive)

## INSTALLATION INSTRUCTIONS

**NOTE: BULKHEAD BASE will lean slightly toward rear of the van.**


**STEP 1:** Locate fourteen attachment points on the vehicle. There are eight M8 weldnuts on the floor, two M6 weldnuts on each side of the B-pillars, and two M6 weldnuts on the roof panel reinforcement (FIGURE 1).

**NOTE: You may need to loosen the B-pillar trims to access the M6 weldnuts.**



**FIGURE 1. FACTORY MOUNTING LOCATIONS  
(SEEN FROM THE REAR)**

**STEP 2:** Install the header panel using the M6-1.0 x 16mm bolts. Do not tighten the bolts at this time (FIGURE 2).

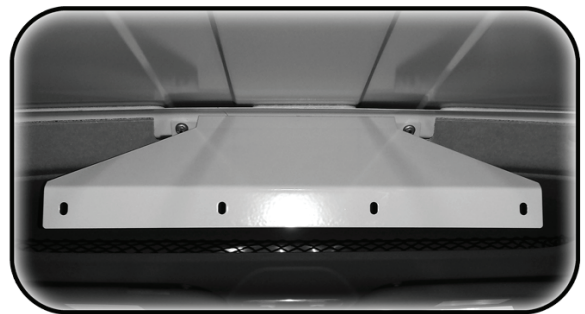

**FIGURE 2. HEADER PANEL INSTALLED**

**STEP 3:** Loosely install the M6 bolts on B-pillars enough to be able to slip on the bracket. Turn the bracket towards the inside of the vehicle. Use 1/4" drive ratchet through the hole to snug up the bolts (FIGURE 3).

**NOTE: The brackets are designed to tuck under the Bi-pillar trim panels on vehicles without the factory bulkhead.**



**FIGURE 3. BRACKET INSTALLATION**

## INSTALLATION INSTRUCTIONS



FIGURE 3. BASE PANEL INSTALL

**STEP 4:** Install the base panel using eight M8-1.25 x 25mm bolts. Use a 13mm wrench to avoid damaging the finish.

**STEP 5:** Install the upper panel using the supplied bolt kit. Use 7/16" ratchet/wrench.

**NOTE:** Mesh panel (96112-3-01) installs on the cabin side of the header panel and the brackets. Window panel (96512-3-01) installs on the cargo side of the header panel and the brackets (FIGURE 4).

**STEP 6:** Tighten all of the bolts.

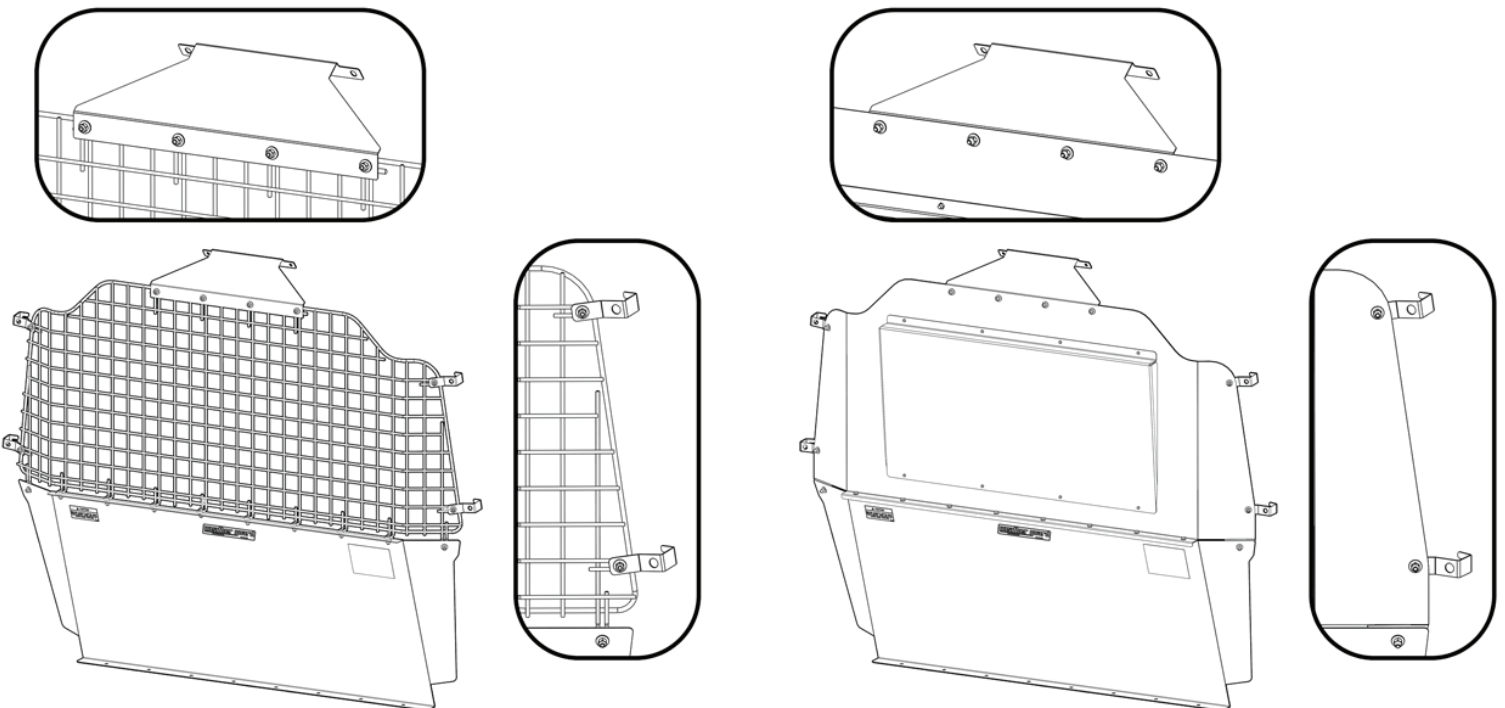


FIGURE 4. DETAILED VIEW



## WARNING

This product can reduce the driver's ability to clearly see roadways, vehicular or pedestrian traffic and other objects through the rear and side windows of the vehicle, which can cause an accident. Extra precautions should be taken when driving a vehicle with this product. Make all adjustments necessary to ensure maximum visibility, including but not limited to, changing mirror and seating positions. State and local laws may prohibit obstruction of windows in a moving vehicle.

These instructions are to be followed using the parts and fasteners supplied for proper installation. Any modifications or improper installation of this product will create a hazardous condition that could result in death, serious personal injury and/or property damage.



## CAUTION

Prior to drilling, so as not to cut electric wires, fuel lines, brake lines, etc., check behind and underneath drilling and mounting locations. To keep debris out of your eyes when checking the underside of the vehicle, or when drilling, always wear protective eye wear. Failure to heed this warning will result in death or serious injury.

## – NOTICE –

Any modification or unintended use of this product shall immediately void all manufacturers warranties. Manufacturer disclaims all liability for injuries to persons or property resulting from any modification to, or unintended use of this product.

## WERNER CO. LIMITED LIFETIME WARRANTY FOR WEATHER GUARD® PRODUCTS

WEATHER GUARD® Products — Limited Lifetime Warranty  
(Purchased on or after 1/1/2009)

Werner Co. (the "Manufacturer") warrants to the original purchaser only that WEATHER GUARD® Truck and Van Products (the "WEATHER GUARD® Product") will be free from defects in material and workmanship from the date of purchase and continuing for the expected lifetime of the WEATHER GUARD® Product. A copy of the original sales receipt must be supplied to the Manufacturer at the time a warranty claim is made. This warranty terminates if the original purchaser transfers the WEATHER GUARD® Product to any other person.

### What is Covered

All WEATHER GUARD® Products identified above that are purchased on or after January 1, 2009.

### What We Will Do to Correct Problems

Subject to the limitations and exclusions described in this limited warranty, the Manufacturer will remedy defects in materials or workmanship by providing one of the following remedies at its option and without charge to the original purchaser for parts or labor: (a) repairing the defective portion of the WEATHER GUARD® Product or (b) replacing the entire WEATHER GUARD® Product. In addition, the manufacturer may elect at its option, not to repair or replace the WEATHER GUARD® Product, but rather issue to the original purchaser a refund equal to the purchase price paid for the WEATHER GUARD® Product or a credit to be used toward the purchase of new WEATHER GUARD® Product.

### What is Not Covered

This limited warranty expressly excludes:

- Defects caused by normal wear and tear, cosmetic rust, scratches, accidents, unlawful vehicle operation, or modification to the product, or any types or repair of a WEATHER GUARD® Product other than those authorized or provided by the Manufacturer.
- Defects resulting from conditions beyond the Manufacturer's control including, but not limited to misuse, overloading, or failure to assemble, mount or use the WEATHER GUARD® Product in accordance with the Manufacturer's written instructions or guidelines included with the WEATHER GUARD® Product or made available to the original purchaser.
- Damage to the contents of the box or vehicle.
- TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL THE MANUFACTURER BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, INCLUDING ANY ECONOMIC LOSS, WHETHER RESULTING FROM NONPERFORMANCE, USE, MISUSE OR INABILITY TO USE THE WEATHER GUARD® PRODUCT OR THE MANUFACTURER'S NEGLIGENCE.

### No Other Express Warranty Applies

This Limited Lifetime Warranty is the sole and exclusive warranty for WEATHER GUARD® products. No employee, agent, dealer, or other person is authorized to alter this warranty or make any other warranty on behalf of Werner Co.

### Notification Procedures

If the WEATHER GUARD® Product does not conform with the terms of this limited warranty, the original owner must promptly notify the Manufacturer in writing upon discovery of the nonconformity. In order to receive the remedies under this limited warranty, the warranty claim must describe the nature of the nonconformity, and a copy of the original sales receipt, invoice, bill or other proof of purchase must accompany the claim. Repairs or modifications made to the WEATHER GUARD® Product by other than the Manufacturer or its authorized agent will nullify this limited warranty. Coverage under this limited warranty is conditioned at all times upon the owner's compliance with these required notification and repair procedures. Warranty claims must include reciprocal contact information and may be made via certified mail to:

### WERNER CO.

ATTN: Weather Guard® Warranty Claims  
555 Pierce Road, STE 300 • Itasca, IL 60143 USA

weatherguard.com

If you have any questions, please call toll free at 1-800-456-7865

